


液状 1,2-SBS



1,2-SBS	含有比 (wt%) o/p/q	Mn	1,2-ビニル (%) m/(m+n)	粘度 (P@45°C)
液状	10/80/10	4,500	≥80	1200

参考値

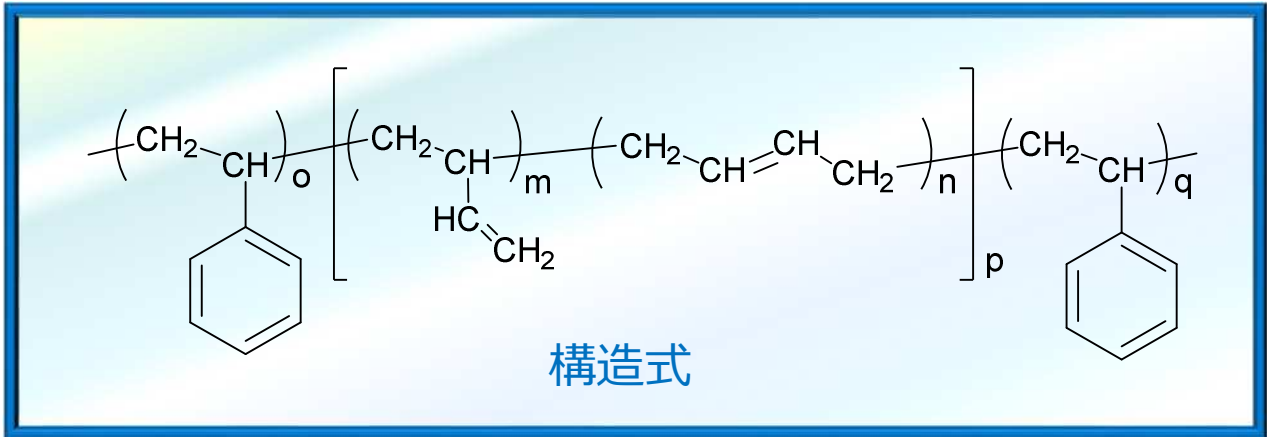

液晶

溶解性

溶媒	液状 1,2-SBS	
	10wt%	50wt%
Toluene	S	S
MEK	S	S

S: 溶解

1,2-SBSに含まれる1,2-ビニル基は、架橋によって物性改善をもたらします。


サンプル供試可能

問合せ: info@nissogr.com

The information described in this sheet is believed to be accurate and is presented in good faith with no guarantee or obligation as to accuracy and no assumption of liability. Users should make their own tests to determine the suitability of products for their own particular use. NISSO makes no warranty of any kind, express or implied, including those of merchantability and fitness for particular purpose other than the material conforms to its applicable current standard specifications.

固形 1,2-SBS

(開発品)

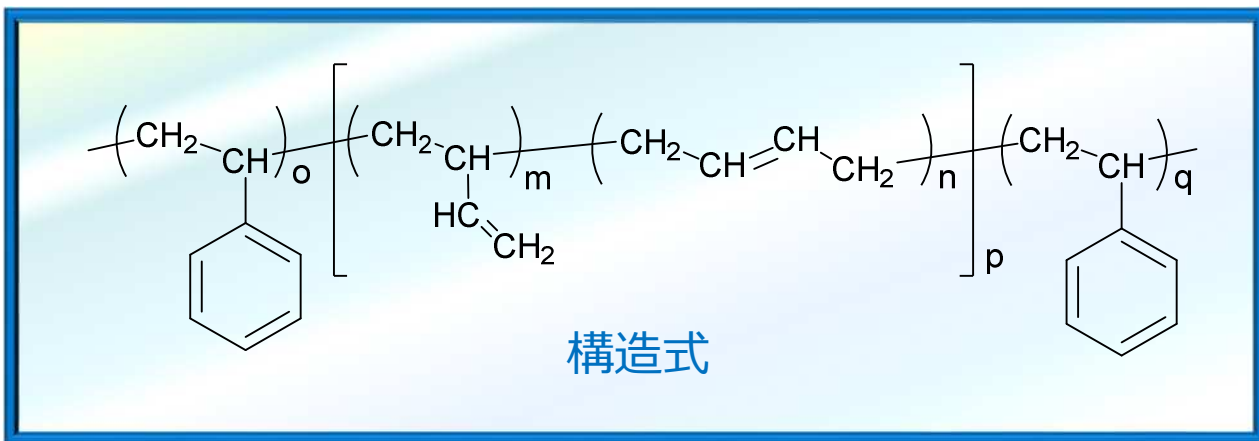

1,2-SBS	含有比 (wt%) o/p/q	Mn	1,2-ビニル (%) m/(m+n)	粘度 (P@45°C)
固形	25/50/25	35,000	≥80	-

参考値



固形

溶解性

溶媒	固形 1,2-SBS	
	10wt%	50wt%
Toluene	S	S
MEK	S	S

S: 溶解

1,2-SBSに含まれる1,2-ビニル基は、架橋によって物性改善をもたらします。

サンプル供試可能

問合せ: info@nissogr.com

The information described in this sheet is believed to be accurate and is presented in good faith with no guarantee or obligation as to accuracy and no assumption of liability. Users should make their own tests to determine the suitability of products for their own particular use. NISSO makes no warranty of any kind, express or implied, including those of merchantability and fitness for particular purpose other than the material conforms to its applicable current standard specifications.